




# BATTERY-BOX HVB



## KEY FEATURES

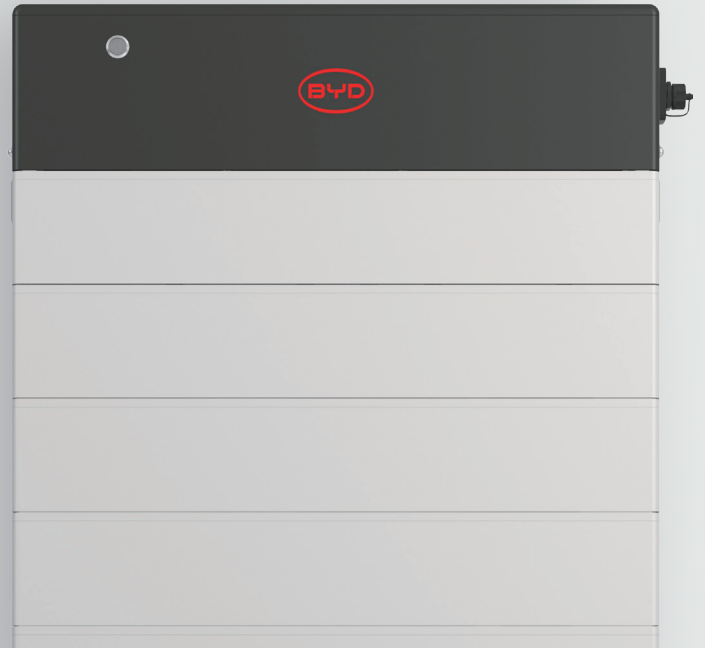

### Safety

LFP cells developed in-house  
Proven in millions of EVs  
Solid die-casting case



### Reliability

1M+ systems in 100+ countries  
LFP expertise since 2002  
15-year warranty



### High Performance

True high voltage for highest efficiencies  
Highest density with cell-to-pack design  
High-power charge / discharge



### Flexibility

Patented internal plug connection  
Extend anytime at any SOC



### Easy Installation

1 module < 30kg, Full tower < 1.3m  
Single-person installation  
Smart configuration



### Intelligent Management

Automatic SOC adjustment  
Remote diagnosis and OTA

## BATTERY-BOX HVB



HVB 5.9



HVB 29.6




3 x HVB 29.6

Maximum capacity of

# 89.07 kWh

# TECHNICAL PARAMETERS HVB

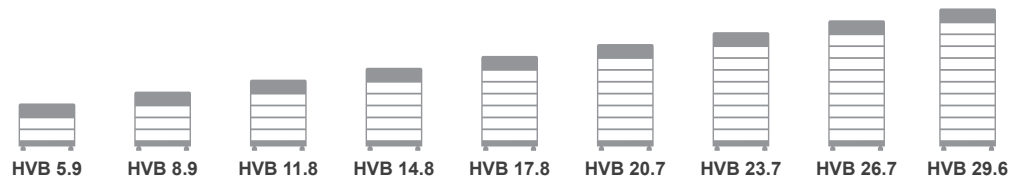

## PERFORMANCE

Battery Module	HVB Module (2.97 kWh, 51.2 V, 27.3 kg)								
Number of Modules	2	3	4	5	6	7	8	9	10
Usable Energy <sup>[1]</sup>	5.94 kWh	8.91 kWh	11.88 kWh	14.85 kWh	17.82 kWh	20.79 kWh	23.76 kWh	26.72 kWh	29.69 kWh
Nominal Voltage	102.4 V	153.6 V	204.8 V	256.0 V	307.2 V	358.4 V	409.6 V	460.8 V	512.0 V
Operating Voltage	80 ~ 115.2 V	120 ~ 172.8 V	160 ~ 230.4 V	200 ~ 288 V	240 ~ 345.6 V	280 ~ 403.2 V	320 ~ 460.8 V	360 ~ 518.4 V	400 ~ 576 V
Dimensions (H/W/D)	479 x 610 x 282 mm	585 x 610 x 282 mm	691 x 610 x 282 mm	797 x 610 x 282 mm	903 x 610 x 282 mm	1009 x 610 x 282 mm	1115 x 610 x 282 mm	1221 x 610 x 282 mm	1327 x 610 x 282 mm
Weight	68.7 kg	96 kg	123.3 kg	150.6 kg	177.9 kg	205.2 kg	232.5 kg	259.8 kg	287.1 kg

## GENERAL DATA

Max Output Current <sup>[2]</sup>	50 A
Peak Output Current <sup>[2]</sup>	98 A, 15 s
Scalability	Max. 3 in Parallel (89.07 kWh)
Installation Mode	Floor installation
Communication	CAN / RS485
Round-trip Efficiency	≥ 95%
Applications	On Grid / On Grid + Backup / Off Grid
Operating Temperature	-20°C to +50°C
IP Class	IP55
Storage Humidity	5%~95%
Altitude	< 4000 m
Battery Cell Technology	Lithium Iron Phosphate (cobalt-free)
Warranty <sup>[3]</sup>	15 Years
Accessories (Optional)	BYD smart WIFI/LAN module
Certification	VDE2510-50 / IEC62619 / CEC / CE / UKCA / UN38.3

[1] DC Usable Energy, Test conditions: 100% DOD, 0.2C charge & discharge at + 25°C. System Usable Energy may vary with different inverter brands.

[2] Power derating will occur between -20°C and 0°C.

[3] Conditions apply. Refer to BYD Battery-Box HVB Limited Warranty Letter.

### NOTE

A: 2.97kWh is the initial capacity (designed) of the Energy Storage Module.

B: The actual capacity is affected by the external environment (such as temperature, transportation, and storage).