Hi-MO X10 Guardian Anti-Dust

LR8-66HVDF

640~665M

- Advanced: N-Type TaiRay Wafer + HPBC2.0 + 0BB
- Aesthetic: No Frontal Gridlines, Scenario Integration
- Safe: Less Micro-Crack, Prevent Localized Overheating, Anti-Shading
- Anti-Dust Design: Patented Frame, Reduce Dust Accumulation



15 15-year Warranty for Materials and Processing

30 30-year Warranty for Extra Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGi


Hi-MO X10 Guardian Anti-Dust


LR8-66HVDF 640~665M


24.62%	0~3%	<1%	0.35%	BC-CELL
MAX MODULE EFFICIENCY	POWER TOLERANCE	FIRST YEAR POWER DEGRADATION	YEAR 2-30 POWER DEGRADATION	LOWER OPERATING TEMPERATURE

Additional Value

30-Year Power Warranty

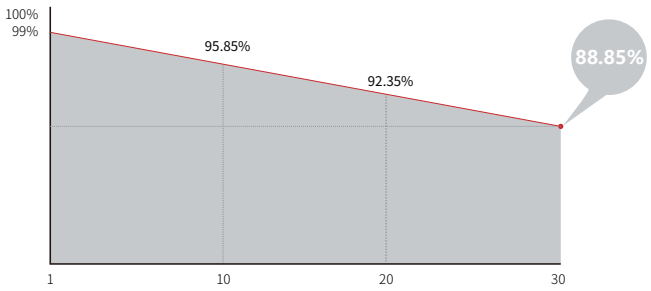



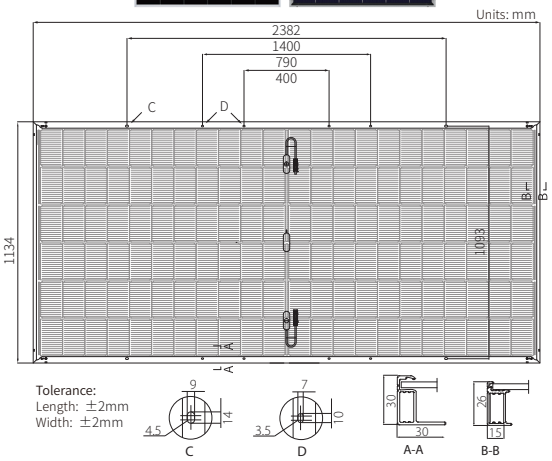

Mechanical Parameters

Cell Orientation	132 (6×22)
Junction Box	IP68, three diodes
Output Cable	4mm², +400, -200mm/±1400mm length can be customized
Glass	Dual glass, 2.0+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy frame
Weight	33.5kg
Dimension	2382×1134×30mm
Packaging	35pcs per pallet / 140pcs per 20' GP / 700pcs per 40' HC

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C Test uncertainty for Pmax: ±3%

Module Type	LR8-66HVDF-640M	LR8-66HVDF-645M	LR8-66HVDF-650M	LR8-66HVDF-655M	LR8-66HVDF-660M	LR8-66HVDF-665M
Testing Condition	STC	STC	STC	STC	STC	STC
Maximum Power (Pmax/W)	640	645	650	655	660	665
Open Circuit Voltage (Voc/V)	49.52	49.62	49.72	49.82	49.92	50.02
Short Circuit Current (Isc/A)	16.38	16.46	16.54	16.62	16.70	16.78
Voltage at Maximum Power (Vmp/V)	40.78	40.88	40.98	41.08	41.18	41.28
Current at Maximum Power (Imp/A)	15.69	15.78	15.86	15.94	16.03	16.11
Module Efficiency(%)	23.69	23.88	24.06	24.25	24.43	24.62

Electrical characteristics with different rear side power gain (Taking 645W as the baseline)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
677	49.62	17.28	40.88	16.57	5%
710	49.62	18.11	40.88	17.36	10%
744	49.72	18.93	40.98	18.15	15%
776	49.72	19.75	40.98	18.94	20%
808	49.72	20.58	40.98	19.73	25%

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	35A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Bifaciality	75±5%
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C

LONGi

Specifications included in this datasheet are subject to change without notice.
LONGi reserves the right of final interpretation. (BGV01 20250821)