



# Accessories

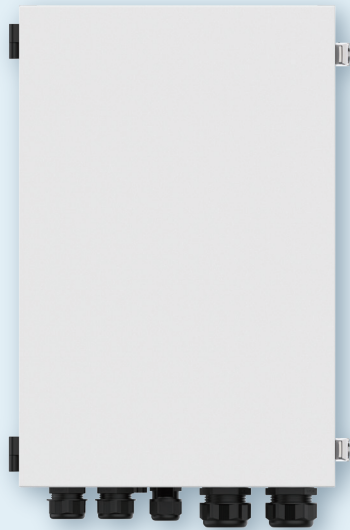

## X3-Matebox G2

We get rid of complicated wiring work by laying all the wires in the Matebox. All you need to do is just to connect all the cables which are already well-sorted in the Matebox. This helps to save time and money.

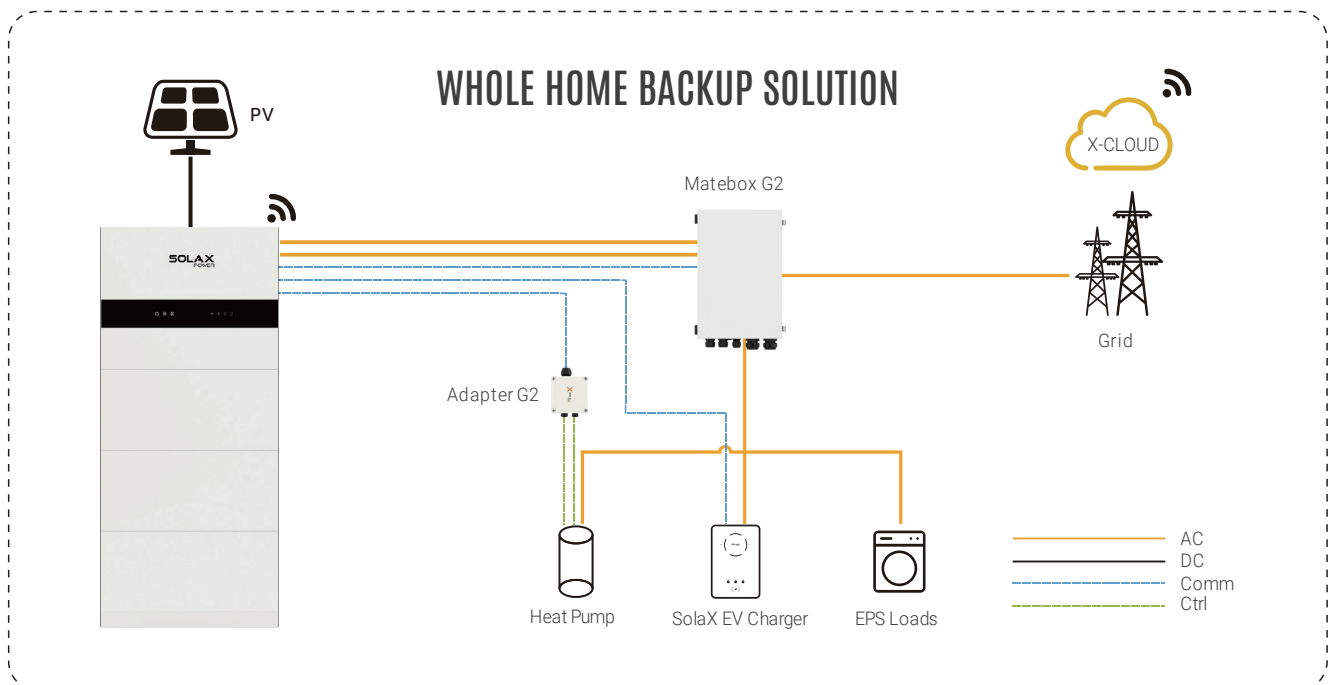

## X3-Matebox G2

### ON-GRID (INVERTER)

Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. Grid (INV) apparent power	16500 VA
Max. Grid (INV) current	32 A

### OFF-GRID (INVERTER)

Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Nominal Off-grid (INV) apparent power	15000 VA
Max. current	25 A
Peak apparent power	30000 VA

### GRID (UTILITY)

Rated grid voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. input current	63 A

### LOAD

Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. current	63 A

### ENVIRONMENT LIMIT

Degree of protection	IP65
Protection class	Class I
Operating temperature range	-25 ~ 60°C (Derating above 45°C)
Storage temperature	-40 ~ 70°C
Relative humidity	0 ~ 100%
Altitude	< 3000 m
Overvoltage category	III (AC)

### OTHER

Cooling concept	Natural cooling
-----------------	-----------------

### DIMENSION AND WEIGHT

Dimensions	549 × 360 × 192 mm
Net weight	13.5 kg